


Mood

- **Mood Adjustable**
- **Mood Fixed**
- **Mood Wall Washer**

Combining style and substance, our invisible recessed downlights are ideal for any architectural space.




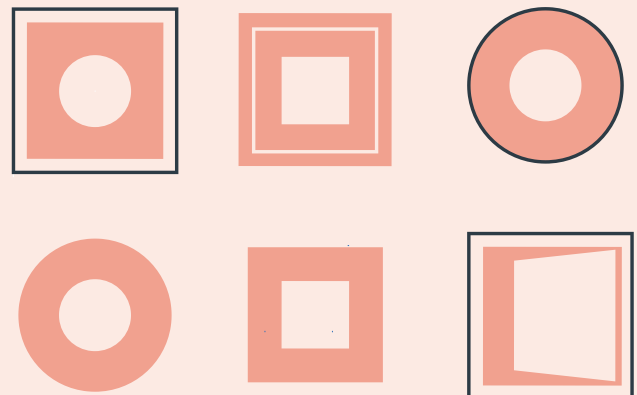

Mood Adjustable

Our adjustable product creates brilliant accent lighting for different environments. The lighting output and aesthetics are of a high standard, featuring multiple optics and a full range of accessories. They are available in various sizes: S, M, L, XL.

IP: dry location IP20 (damp location IP44 with accessory)

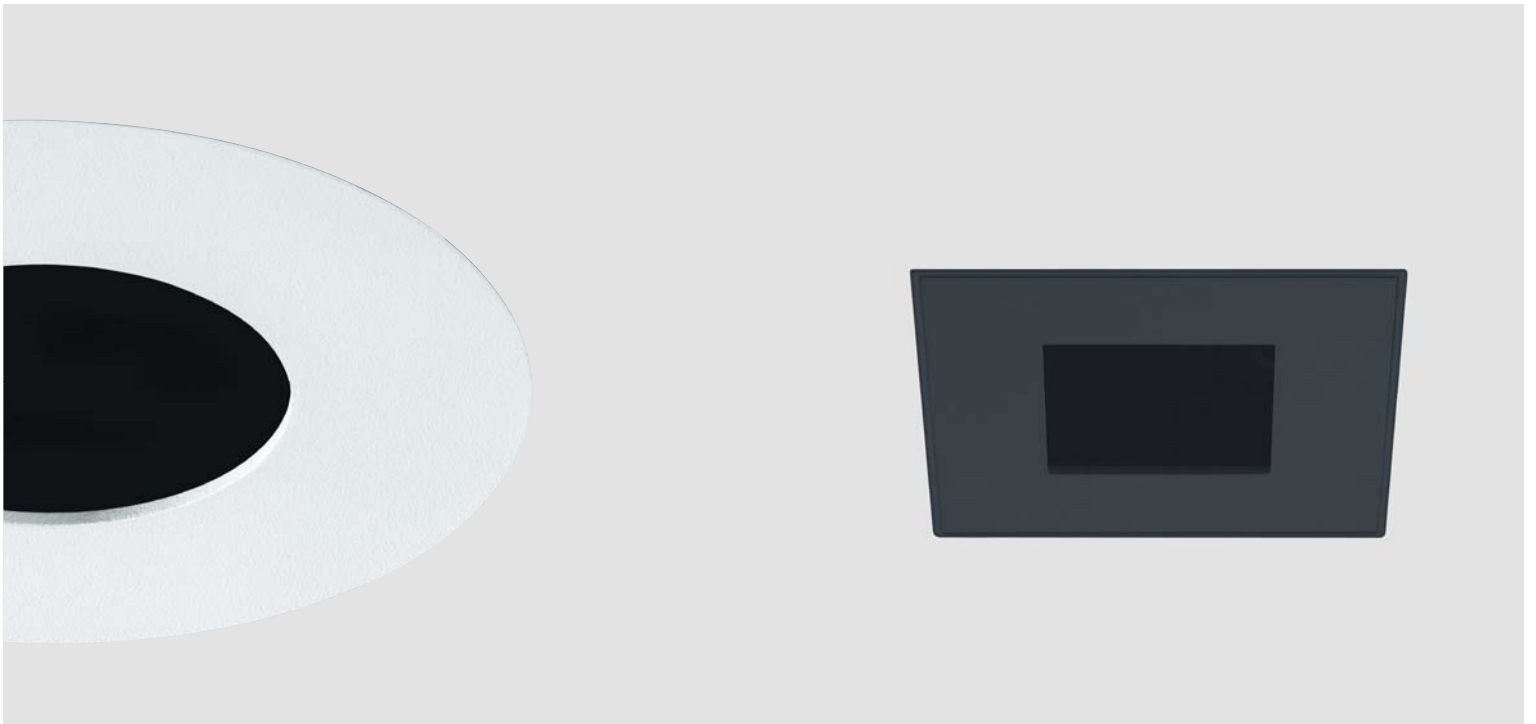

Standard Finishes:Embossed
matt white

12

Embossed
matt black

31

On request:

Chrome
Gold
Silver
Copper
Royal matt white
Royal matt black
Primer

**Plate shapes:**

*Available for:
M, L, XL versions

Round
Flush*Round
Cone*Round
Curve
(accessory)Square
Flush*Square
Pyramid*Square
Curve
(accessory)**Shapes:**Round
TrimRound
TrimlessSquare
TrimSquare
Trimless**Optics:**

Narrow





Medium



Wide



Very Wide

Adjustability:Horizontal
axisVertical
axis

35°: S, XL versions
40°: M, L versions

Optic Accessories:


Honeycomb

Holder for colored
and selective filters**Plate accessories:**IP44
GlassIP44
Elliptical
glassIP44
Diffusive
lensIP44
Opal
lensIP44
Wall washer*
lens


*Available for:
M, L, XL versions

Technical features:

S





Trimless





3.5W
Initial: 315-375lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM <3
CRI >80, CRI >90
On/Off, 0-10V Dimming, Phase-cut

M

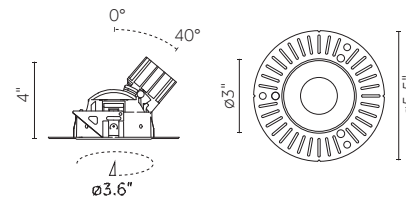

8.5W
Initial: 725-875lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM <3
CRI >80, CRI >90
On/Off, 0-10V Dimming, Phase-cut

L

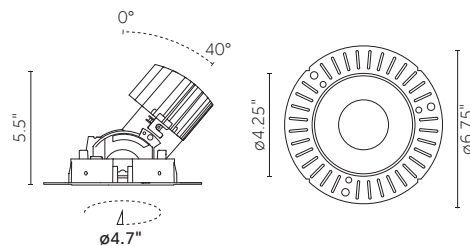
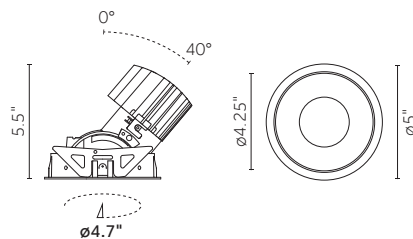


12W, 17W
Initial: 1320-2265lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM <3
CRI >80, CRI >90
On/Off, 0-10V Dimming, Phase-cut

Warm Dimming:
13W, Initial: 100-1000lm,
2000K - 3000K, CRI >95
0-10V Dimming, Phase-cut

Phosphor LED Module:
16W, Initial: 1000lm
2700K, 3000K, 4000K / SDCM <2
CRI >95
On/Off, 0-10V Dimming, Phase-cut



XL

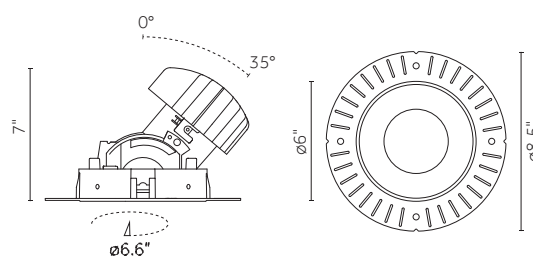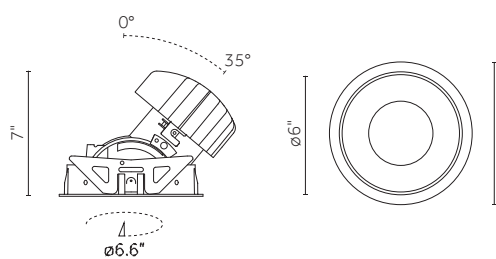



24W, 33W
Initial: 1800-4150lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM <3
CRI >80, CRI >90
On/Off, 0-10V Dimming, Phase-cut

Warm Dimming:
34W, Initial: 200-2850lm,
2000K - 3000K, CRI >95
0-10V Dimming, Phase-cut



Phosphor LED Module:
22W, Initial: 2000lm
34W, Initial: 3000lm
2700K, 3000K, 4000K / SDCM <2
CRI >95
On/Off, 0-10V Dimming, Phase-cut

Technical features:**S****Trimless**

3.5W
 Initial: 315-375lm / L70 50,000h
 2700K, 3000K, 3500K, 4000K / SDCM < 3
 CRI > 80, CRI > 90
 On/Off 0-10V Dimming, Phase-cut

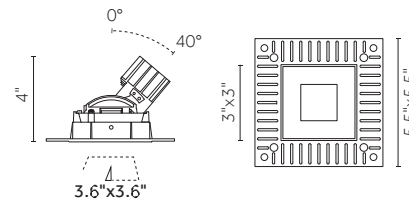M



8.5W
 Initial: 725-875lm / L70 50,000h 2700K,
 3000K, 3500K, 4000K / SDCM < 3
 CRI > 80, CRI > 90
 On/Off 0-10V Dimming, Phase-cut

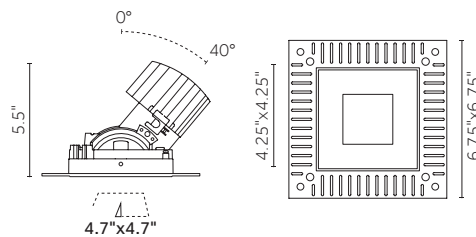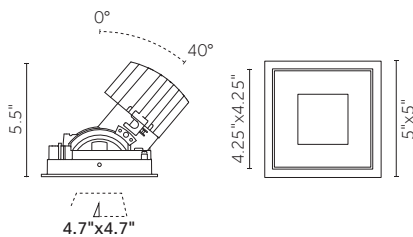L

12W, 17W
 Initial: 1320-2265lm / L70 50,000h
 2700K, 3000K, 3500K, 4000K / SDCM < 3
 CRI > 80, CRI > 90
 On/Off 0-10V Dimming, Phase-cut

Warm Dimming:
 13W, Initial: 100-1000lm,
 2000K-3000K, CRI > 95
 0-10V Dimming, Phase-cut

Phosphor LED Module:
 16W, Initial: 1000lm
 2700K, 3000K, 4000K / SDCM < 2
 CRI > 95
 On/Off 0-10V Dimming, Phase-cut

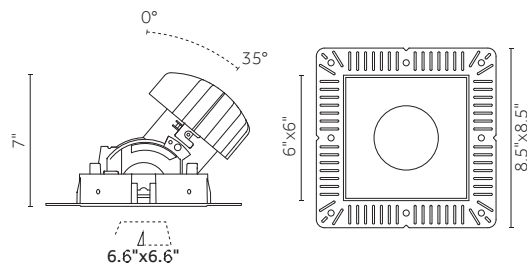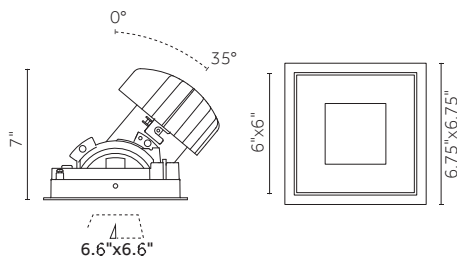
XL

24W, 33W
 Initial: 1800-4150lm / L70 50,000h
 2700K, 3000K, 3500K, 4000K / SDCM < 3
 CRI > 80, CRI > 90
 On/Off 0-10V Dimming, Phase-cut


Warm Dimming:
 34W, Initial: 200-2850lm,
 2000K-3000K, CRI > 95
 0-10V Dimming, Phase-cut

Phosphor LED Module:
 22W, Initial: 2000lm
 34W, Initial: 3000lm
 2700K, 3000K, 4000K / SDCM < 2
 CRI > 95
 On/Off 0-10V Dimming, Phase-cut


Sizes:

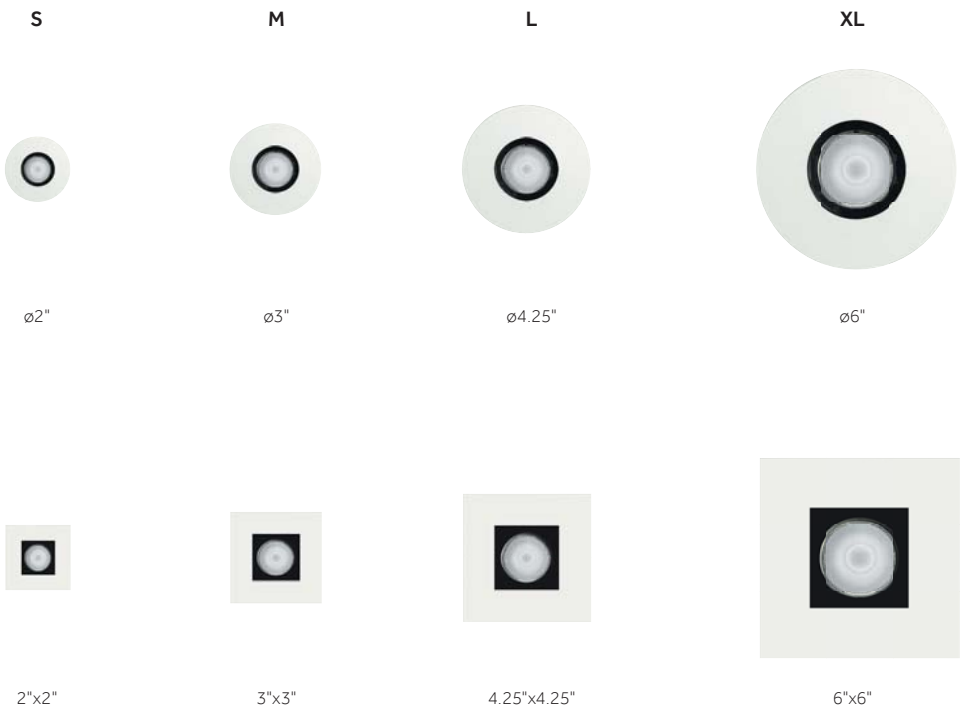

Adjustability:




Horizontal axis
(358°)



Vertical axis
35°: S, XL versions
40°: M, L versions

Different shapes, trims and finishes

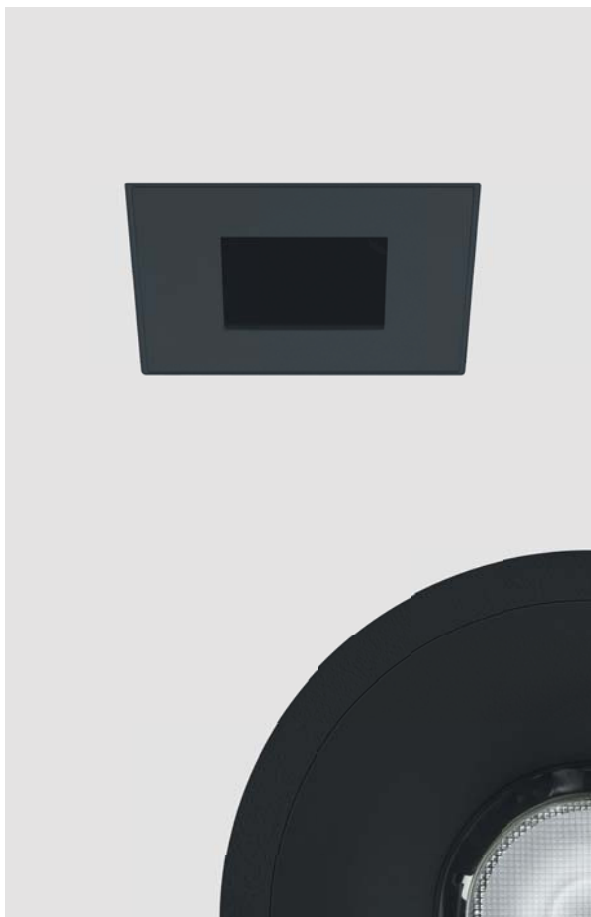

Newly designed optics for very narrow, medium and wide beam angles



Easy lock and adjustability system, no tools required

Adjustable graduated scale

Mood Fixed

Our wide range of fixed Mood comes in five sizes, from 1.25 inches to 6 inches. The opal diffuser makes the light soft, and the reflectors can change the beam angles, providing flexibility. The Mood is ideal for all architectural applications and IP44 certification provides durability and protection.

IP: damp location IP44



Finishes:Embossed
matt white

12

Embossed
matt black

31

Embossed
matt black/Gold

T7

Embossed
matt white/Copper

T9

On request:

Chrome
Gold
Silver
Copper
Royal matt white
Royal matt black
Primer

**Shapes:**Round
TrimRound
TrimlessSquare
TrimSquare
Trimless**Optics:**

Narrow



Medium



Wide




Very Wide


Alternate Versions:Hollow
domeHollow
cylinder

Technical features:

XS





Trimless





2.5W
Initial: 155-191lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut

S





3.5W
Initial: 315-375lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut

M

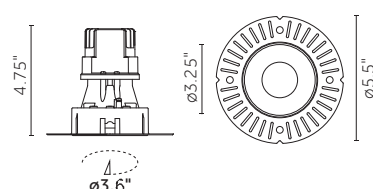

8.5W
Initial: 725-875lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut

L

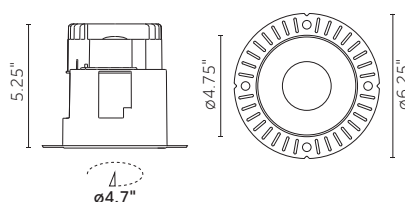
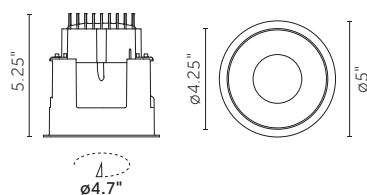


12W, 17W
Initial: 1320-2265lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut

Warm Dimming:
13W, Initial: 100-1000lm, 2000K-3000K,
CRI > 95
0-10V Dimming, Phase-cut

Phosphor LED Module:
16W, Initial: 1000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off 0-10V Dimming, Phase-cut

XL

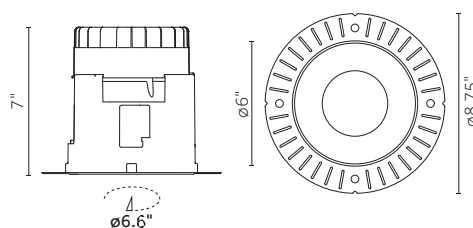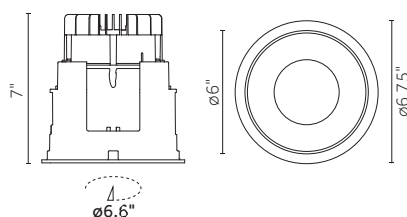

24W, 33W
Initial: 1800-4150lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut


Warm Dimming:
34W, Initial: 200-2850lm, 2000K-3000K,
CRI > 95
0-10V Dimming, Phase-cut

Phosphor LED Module:
22W, Initial: 2000lm
34W, Initial: 3000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off 0-10V Dimming, Phase-cut


Technical features:

XS

Square trim





Trimless





2.5W
Initial: 155-191lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut

S





3.5W
Initial: 315-375lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut

M

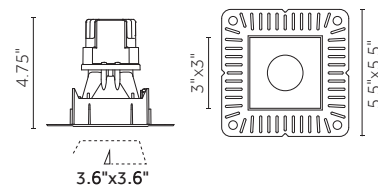

8.5W
Initial: 725-875lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut

L

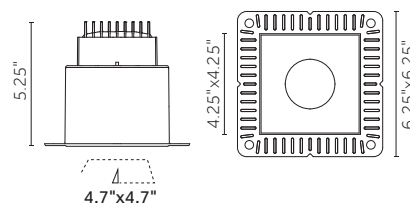
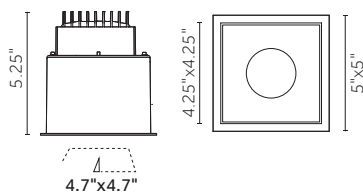


12W, 17W
Initial: 1320-2265lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut

Warm Dimming:
13W, Initial: 100-1000lm, 2000K-3000K,
CRI > 95
0-10V Dimming, Phase-cut

Phosphor LED Module:
16W, Initial: 1000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off 0-10V Dimming, Phase-cut

XL

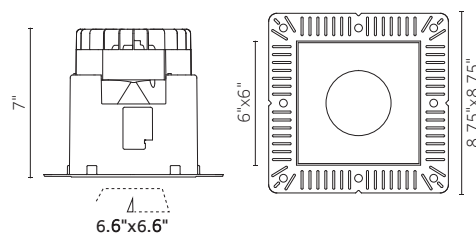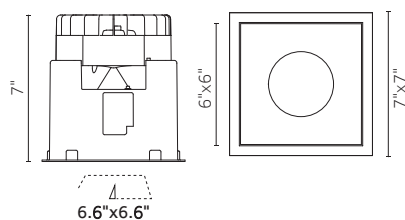

24W, 33W
Initial: 1800-4150lm / L70 50,000h
2700K, 3000K, 3500K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off 0-10V Dimming, Phase-cut

Warm Dimming:
34W, Initial: 200-2850lm, 2000K-3000K,
CRI > 95
0-10V Dimming, Phase-cut

Phosphor LED Module:
22W, Initial: 2000lm
34W, Initial: 3000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off 0-10V Dimming, Phase-cut

Sizes:

XS	S	M	L	XL
				
ø1.25"	ø2"	ø3"	ø4.25"	ø6"
				
1.25"x1.25"	2"x2"	3"x3"	4.25"x4.25"	6"x6"

Accessories:



Hollow dome



Hollow cylinder


High performance compact heat sink



Recessed LED source for excellent visual comfort



High quality
of finishes and
minimalist design

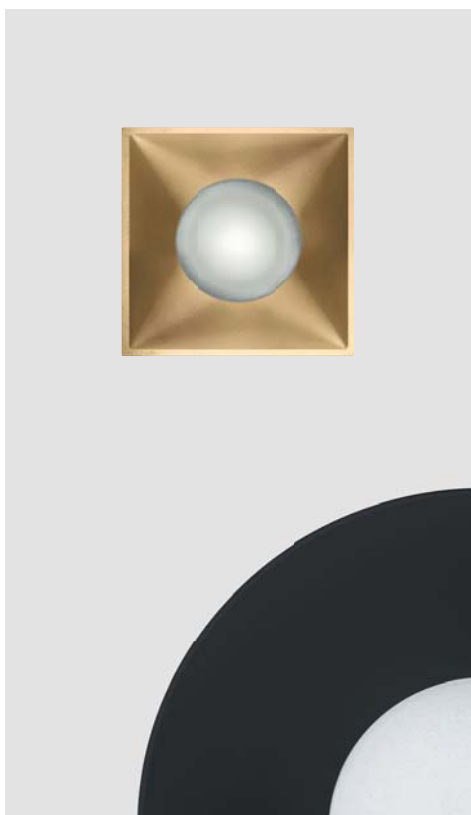

Silicone gasket for IP44 protection

Diffusive dome for soft light effect

Mood Wall Washer

Our ultimate solution for wall wash illumination is available in both circular and square shapes. We offer four sizes of minimalist recessed downlights, scaling from two to six inches and two different types of flush and drop lenses.

IP: damp location IP44



Standard Finishes:

Embossed
matt white

12



Embossed
matt black

31

On request:

Chrome
Gold
Silver
Copper
Royal matt white
Royal matt black
Primer

**Plate shapes:**

Round
Flush



Round
Drop



Square
Flush



Square
Drop



Round flush
Elliptical lens
(accessory)



Round drop
Elliptical lens
(accessory)



Square flush
Elliptical lens
(accessory)



Square drop
Elliptical lens
(accessory)

Shapes:

Round
Trim



Round
Trimless



Square
Trim



Square
Trimless


Optics:

Wall
washer*


*Different distributions available in accordance to primary and secondary optics selection.

Adjustability:


Steps




1



2











3





4



3 steps: S,M,L versions
4 steps: XL Version

Technical features:

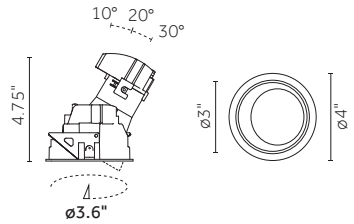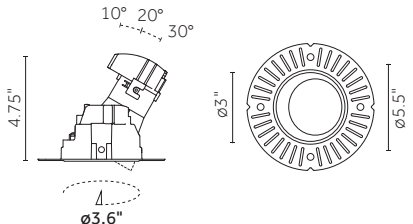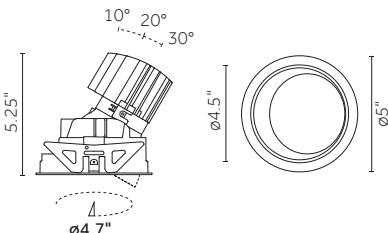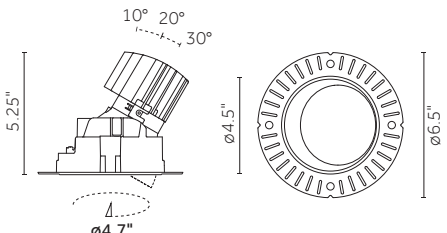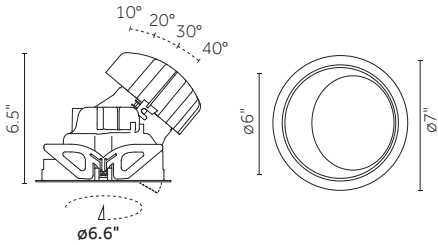
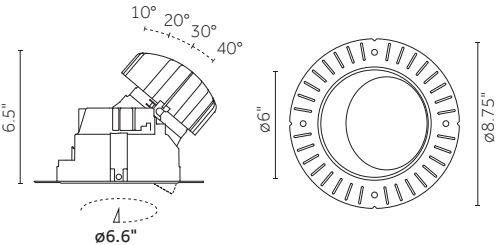
	Round trim	Trimless	
S			3.5W Initial: 315-375lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut
M			8.5W Initial: 725-875lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut
L			12W, 17W Initial: 1320-2265lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut Warm Dimming: 13W, Initial: 100-1000lm, 2000K-3000K, CRI > 95 0-10V Dimming, Phase-cut Phosphor LED Module: 16W, Initial: 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off 0-10V Dimming, Phase-cut
XL			24W, 33W Initial: 1800-4150lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut Warm Dimming: 34W, Initial: 200-2850lm, 2000K-3000K, CRI > 95 0-10V Dimming, Phase-cut Phosphor LED Module: 22W, Initial: 2000lm 34W, Initial: 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off 0-10V Dimming, Phase-cut

Technical features:**S****Trimless**

3.5W
Initial: 315-375lm / L70 50,000h
2700K, 3000K, 3500K, 4000K/SDCM<3
CRI>80, CRI>90
On/Off 0-10V Dimming, Phase-cut

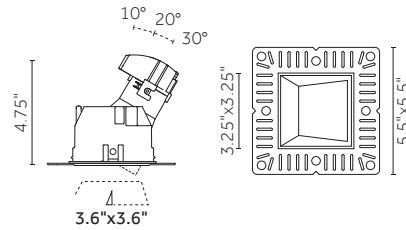M



8.5W
Initial: 725-875lm / L70 50,000h
2700K, 3000K, 3500K, 4000K/SDCM<3
CRI>80, CRI>90
On/Off 0-10V Dimming, Phase-cut

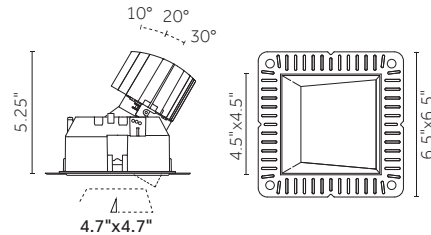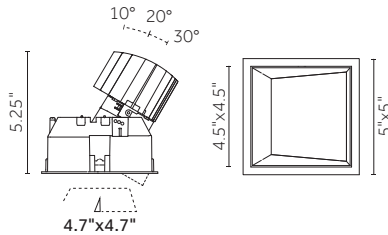L

12W, 17W
Initial: 1320-2265lm / L70 50,000h
2700K, 3000K, 3500K, 4000K/SDCM<3
CRI>80, CRI>90
On/Off 0-10V Dimming, Phase-cut

Warm Dimming:
13W, Initial: 100-1000lm, 2000K-3000K,
CRI>95
0-10V Dimming, Phase-cut

Phosphor LED Module:
16W, Initial: 1000lm
2700K, 3000K, 4000K/SDCM<2
CRI>95
On/Off 0-10V Dimming, Phase-cut

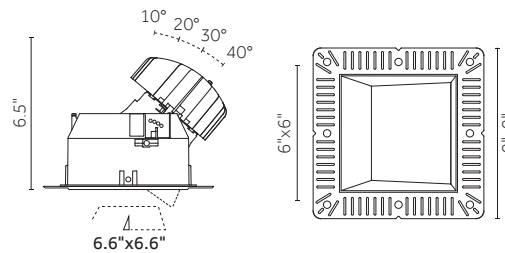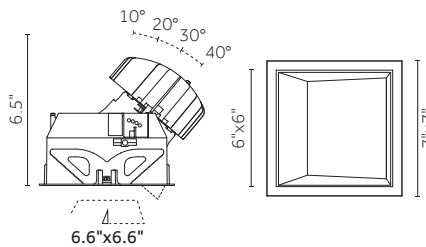XL

24W, 33W
Initial: 1800-4150lm / L70 50,000h
2700K, 3000K, 3500K, 4000K/SDCM<3
CRI>80, CRI>90
On/Off 0-10V Dimming, Phase-cut


Warm Dimming:
34W, Initial: 200-2850lm, 2000K-3000K,
CRI>95
0-10V Dimming, Phase-cut

Phosphor LED Module:
22W, Initial: 2000lm
34W, Initial: 3000lm
2700K, 3000K, 4000K/SDCM<2
CRI>95
On/Off 0-10V Dimming, Phase-cut

Sizes:

S	M	L	XL
			
ø2"	ø3"	ø4.25"	ø6"
			
2"x2"	3"x3"	4.25"x4.25"	6"x6"

Adjustability:



10° 20° 30° 40°

3 steps: S,M,L versions
4 steps: XL version (40°)



1

2

3

4

High performance diffuser



Minimalist design

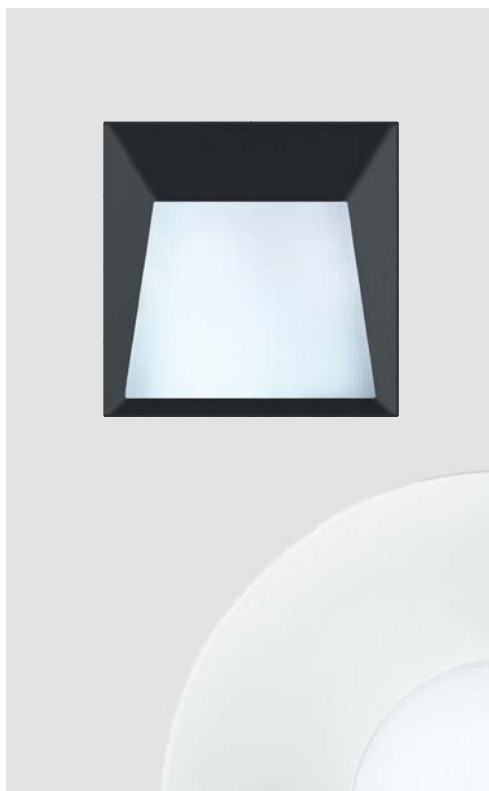


Plate version: drop



Plate version: flush